




Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com

Sound Surveillance™

TELCO-AD1 Channel Cabling Adaptor

Description

The TELCO-AD1 adaptor set is used to power up and transmit the audio signal from any ETS SM1 series microphone over unshielded 4 conductor cable runs or spare conductors available in telephone systems. Compatible with all ETS interface boxes and base stations.

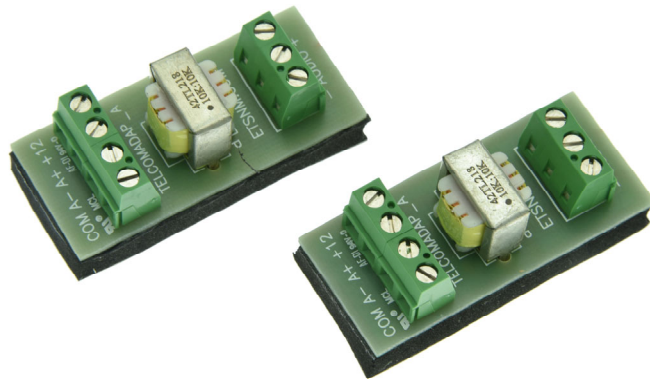

Includes

- 2ea TELCO-AD1 board
- Installation instructions

Wiring requirements:

- Microphone and interface to TELCO-AD1 boards, 2 conductor shielded #22, 100 feet max
- Main cable run 1000 feet max

TELCO-AD1 Specifications

- 4 position terminal blocks for main cable run.
- 3 position terminal blocks for microphone and interface connections.
- Converts SM1 series microphone signals to balanced audio at 10K Ohms impedance permitting the use of long distance unshielded cable runs.
- Double stick tape mounting.
- Dimensions: L2.1 x W.94 x H.82
- Weight: .02kg

Warranty 1 year parts and labor.

Made in USA