



Electronic Technical Services Inc.  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926


Sound Surveillance™

# SM1-EJ Omni-directional, Ethernet Jack style, Pre-amplified Microphone

## Description

High performance, Omni-directional, pre-amplified microphone for fixed location security applications. Dual Ethernet jack wall plate features one working Ethernet jack and a microphone in the other. 25' pickup pattern in all directions. Built in limiter circuit automatically lowers the output level during loud sound intervals. Selectable lo-cut and hi-cut filters significantly reduce background noise.

Connects directly to our switcher / mixer / amplifiers or use one of our many interface products to make fast and clean connections to DVRs or remote monitoring equipment.

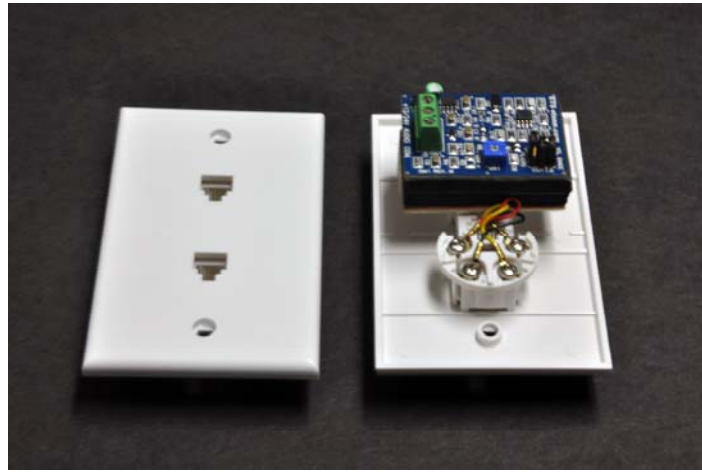

## Includes:

- SM1-EJ Surface mount microphone.
- Warning label.
- Installation instructions.

## Wiring requirements:

2 conductor shielded (with drain wire) 22 gauge stranded. Max cable length 1500'.

## Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

## Warranty

1 year parts and labor.

## SM1-EJ Specifications

- Omni-directional 25' pickup pattern.
- One functioning Ethernet jack
- Low noise MOSFET pre-amplifier.
- 500Hz-13Khz Frequency response.
- Jumper selectable hi-cut/low-cut filters limit frequency response to 900-6khz significantly reducing background noise.
- Jumper selectable volume range:  
"Line level" (0db) or  
"Microphone level" (-30db)
- Adjustable gain in both volume ranges.
- 100 Ohm unbalanced output.
- Internal peak limiter circuit (.5 sec response)
- 3 position Euro-style connector makes cable termination fast and clean.
- Reverse polarity protected
- Power: 12 to 24VDC @ 10mA.
- On-board voltage regulator and RFI filtering.
- S/N ratio: more than 60DB
- Sensitivity -45DB
- Industrial temperature range -40 to 105C.
- Dimensions: L 4.5" W 2.7" H 1.8"
- Weight .09lbs