



Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com


Sound Surveillance™

ML1-MD Covert, PIR Style Omni-directional Microphone

Description

The ML1-MD is a low cost omni-directional electret microphone for use with IP cameras accepting **microphone level input** signals (PC compatible input). The covert housing has the appearance of a modern PIR motion detector. The attached cord is 6' long and comes standard with a stereo 3.5mm connector on one end. The ML1-MD's 3.5mm connector can be removed and the cord can be directly connected to cameras with terminal blocks

For use with IP cameras accepting microphone level inputs (the camera supplies power to ECM cartridge)

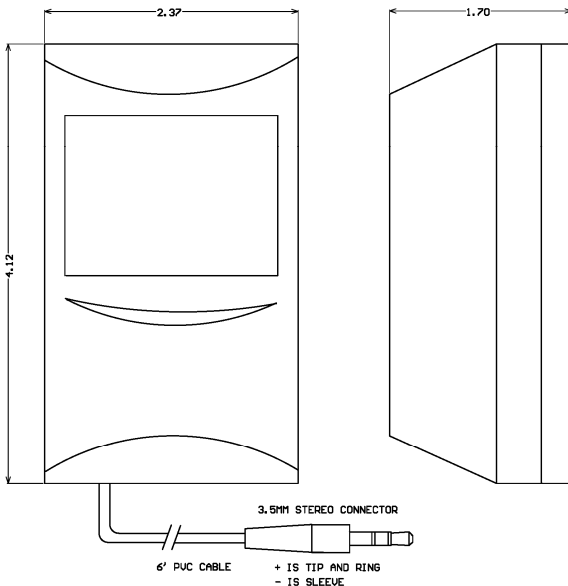

Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

Warranty 1 year parts and labor,

Made in USA

ML1-MD Specifications

- Omni-directional pattern
- Max SPL 120db
- Frequency response: 50-16khz
- Sensitivity -43db
- -40db output (mic level)
- 2-10Vdc operation
- 2-5k Ohm load resistance
- S/N 60db
- 6' standard length cable
- 3.5mm stereo connector
- White plastic Single gang plate
- Operating temperature -30 to 70C
- Weight: 0.025 lbs

Includes

- ML1-MD microphone.
- Warning label.

Options

- Cable lengths of up to 25' are available. Add -XX to P/N where XX = number of feet
- Add -FL to P/N for flying lead output
- Add -LN to P/N for higher performance capsule