

The MLI-1U Microphone PC interface is for use with ETS ML1 series microphones or PC analog microphones. Features include adjustable gain adjustable low cut filter in two ranges and Mute switch with indicator.

### Microphone Placement

Locate the microphone as close as possible to the area of interest in the space to be monitored. Do not mount the microphone near air conditioning vents, light fixtures or electrical equipment. Most microphones operate optimally 3-5 feet away from the subject(s) to be monitored. Microphones are still useable in the range of 5-25 feet but it is dependent on the level of background noise in the area. Experimentation in the environment will determine what distances work best.

### MLI-1U location and power

The MLI-1U interface box is designed to be placed near the PC or other USB compatible device. Once all settings are made, the interface can be located out of view. All controls are recessed to reduce the possibility of accidental “bumping” of settings.

### Microphone Cable Run

ML1 series microphones are limited to 25’ cable lengths. Please specify when cable length when ordering

### Microphone input

The microphone input is stereo 3.5mm wired mono. Ring is ground and tip and sleeve are the signal

### Microphone Volume

Set this control for the best undistorted sound. Mid range for near field audio pickup and full Clockwise for far field pickup. Experiment with the settings for the best result.

### Low Cut control

The MLI-1U includes a low cut control in two ranges for applications where pickup of low frequencies are less desirable. When turned to the fully clockwise or 150hz or 1500hz position, ambient background noise will be significantly reduced. When fully counterclockwise the frequency is limited to 20 or 200hz

### Connecting to PC

In sound settings of windows, select PnP Audio device for microphone input. We suggest setting the mic volume to midrange for near field applications and full volume for far field applications. Experiment with the settings for the best result.

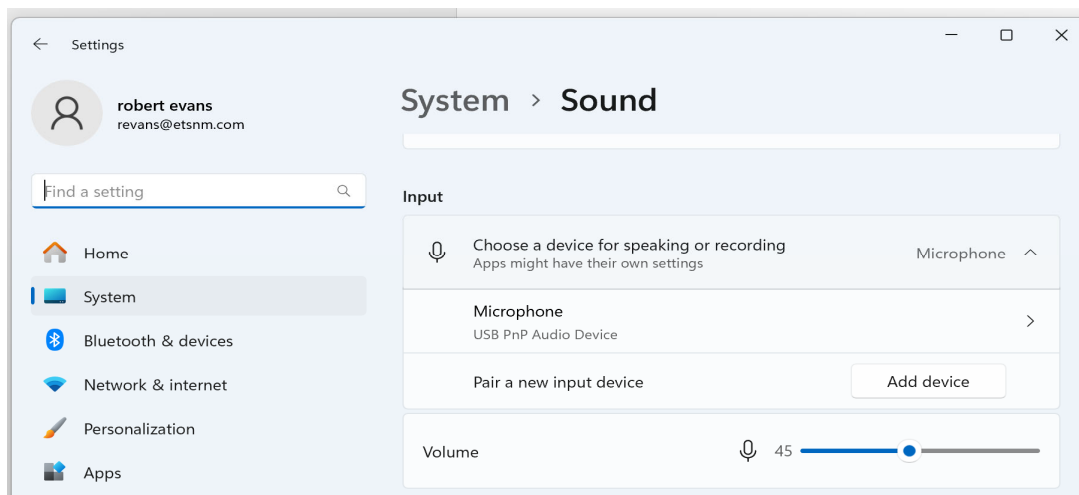


Figure 1

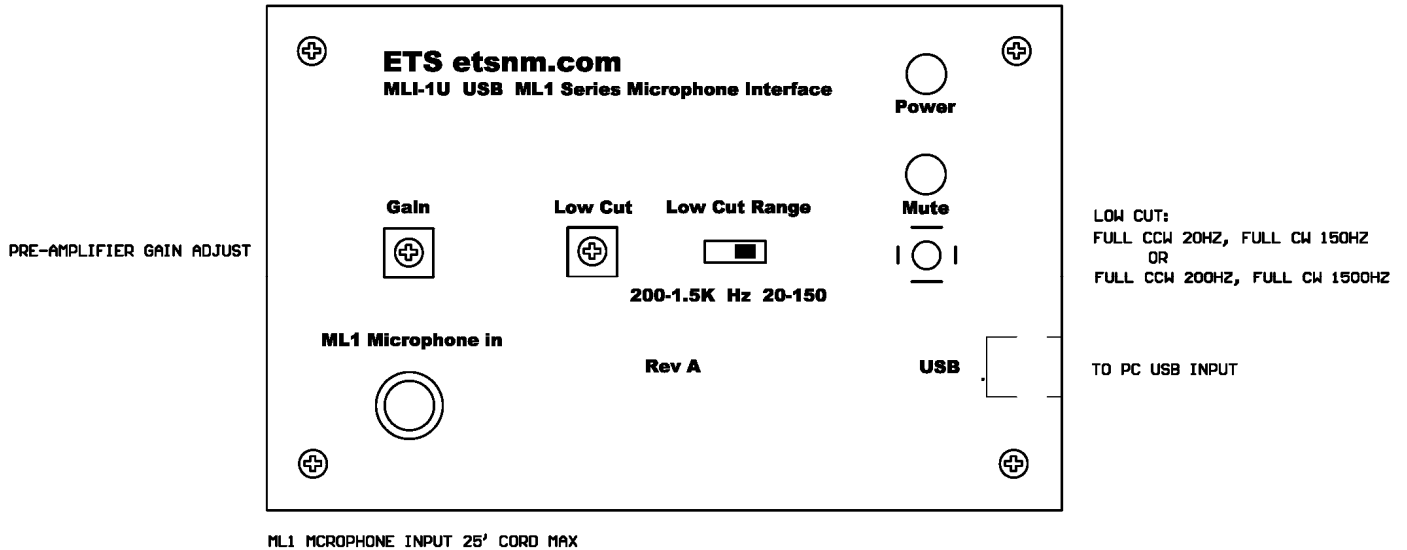


Figure 2.

### Caution

It may be against the law to install this microphone kit in certain environments. It may also be against the law to record conversations of the person(s) being monitored without their knowledge. It is the responsibility of the installation company and end-user to determine if the application of this product is legal. These laws vary from state to state. If you are not informed on these matters, consult a qualified attorney or contact the appropriate state agency. A sticker is provided with this kit for the applications where notification must be posted.

### Warranty

All ETS products carry a one year parts and labor warranty. This warranty does not cover damages as a result of misuse, improper handling of the unit or exposure to extreme temperatures or moisture. At its discretion, ETS reserves the right to repair or replace this unit under the conditions of the warranty. If you experience problems with your equipment call ETS at: 505-888-3923 to obtain a return authorization number. Equipment requiring repair beyond the warranty period or units that have been damaged or are not covered under the warranty can be repaired by ETS for a minimal cost under most conditions.

Made in the USA  
by  
**ETS Inc.**