


ML1-HDU Hanging Uni-directional Microphone

Description

The ML1-HDU is a low cost Uni-directional electret microphone for use with IP cameras accepting **microphone level input** signals (PC compatible input). Designed for high ambient noise environments. The attached 12ft cord is adjustable in hang down length and comes standard with a stereo 3.5mm connector on one end. Add -FL to the P/N for a flying lead output for connections to cameras with terminal blocks.

For use with IP cameras accepting microphone level inputs (the camera supplies power to ECM cartridge)

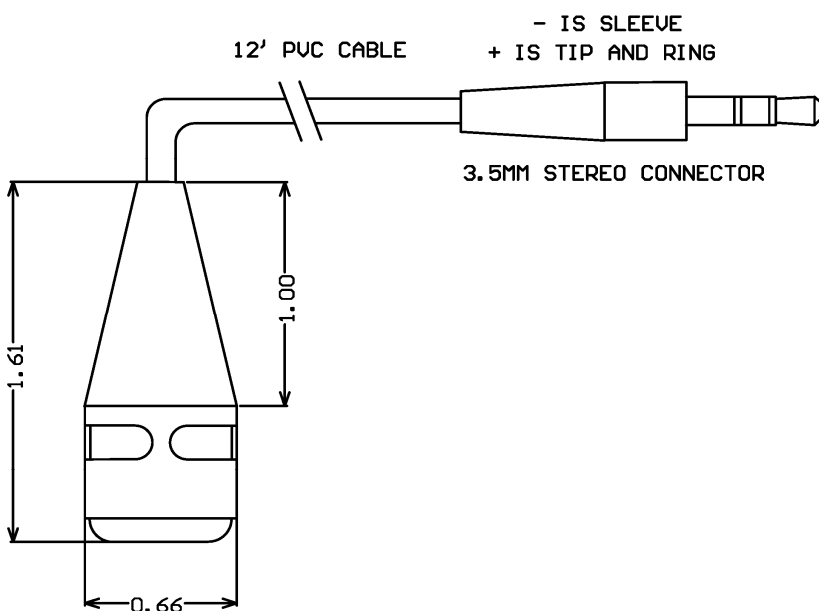

ML1-HDU Specifications

- Uni-directional pattern, -12db attenuation on all sides
- Max SPL 120db
- Frequency response: 50-16khz
- Sensitivity -43db
- -40db output (mic level)
- 2-10Vdc operation
- 2k-5k Ohm load resistance
- S/N 60db
- 12' standard cable length
- 3.5mm stereo connector
- Ivory Single gang Plastic plate, Aluminum mic holder
- Operating temperature -30 to 85C
- Weight: 0.10 lbs

Includes

- ML1-HDU microphone.
- Warning label.
- Ivory single gang BNC plate
-

Options

- For cable lengths of up to 25'
 Add -XXFT to part number where
 XX = cable length in feet.
- Add -FL to P/N for flying lead output
- Add -LN for high performance capsule

Caution

It is the responsibility of the installation company and end user to install this audio surveillance equipment in compliance with state and federal privacy laws. If you are unfamiliar with these laws, consult a qualified attorney.

Warranty 1 year parts and labor,

Made in USA