



Electronic Technical Services Inc.  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926  
Website: www.etsnm.com

Sound Surveillance™

## SMA1-LPC5 Speaker Driver Microphone Interface

### Description

The SMA1-LP-C5 is a line level, 2 Watt, 70V speaker driver (power amplifier) and SM series microphone interface typically for use in 2 way audio surveillance systems. A single CAT5 cable connects the SMA1-LP-C5 to any ETS speaker/microphone ordered with a C5 option. Directly connects to DVRs and remote monitoring equipment.

Use one of our Sound Surveillance speakers with a built in 70V transformer & SM1 microphone (CAT5 option) for cable runs up to 1000 feet.

### Includes

- SMA1-LP-C5 Speaker driver / microphone interface.
- 12Vdc AC adapter.
- 2 each 3' RCA or 3.5mm patch cable.
- Installation instructions.

### Options


- Add -3.5MM or -FL (Flying Leads) to P/N for alternate output cables.

### Wiring Requirements

- 1 CAT5 8 conductor cable and 2 each RJ45 connectors. 1000' max.

Warranty : 1 year parts and labor.

Made in USA

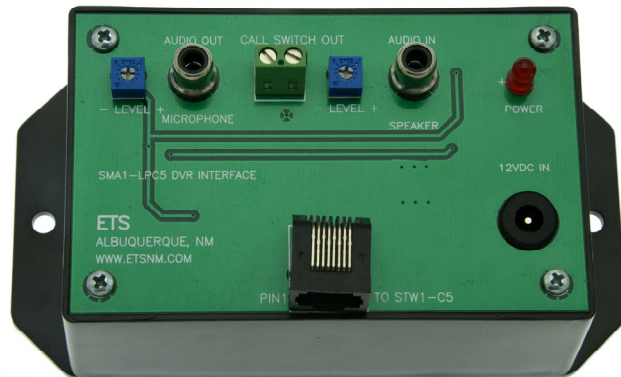

### SMA1-LP-C5 Speaker microphone interface

- Single CAT5 cable run up to 1000' between SMA1-LP-C5 and speaker/microphone.
- Line level (0db) audio input and outputs.
- RCA input / output jacks.
- Adjustable volume controls for speaker and microphone.
- 2.5 Watts RMS power output (70v balanced line).
- Balanced microphone signal transmission.
- Frequency response 200-10Khz.
- Short circuit protected.
- Built in 70V 2w audio power transformer.
- Terminal block call sw connection
- LED power indicator and PPTC fused.
- Call sw: unreferenced, 2 free terminals.
- Power: 12vdc 250ma
- Black plastic ABS housing.
- Dimensions: L 5.3 x W 3.3 x H 1.6
- Weight .123kg

### Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning labels in plain view is all that is required.