ETS

Sound Surveillance tm

HPDA-3 Three Channel Flush Wall Mount Headphone Monitoring Station for ETS SM1 series microphones

Description

The HPDA-3 is a flush wall mounted, headphone monitoring station for use with ETS SM1 series microphones. The HPDA-3 is housed in a double gang stainless steel plate for ease of installation on electrical boxes. The HPDA-3 features independent amplifiers and volume controls for up to 3 headphones. The HPDA-3 also features DVR connectivity for live and playback sound monitoring.
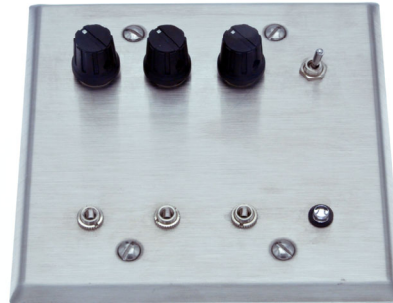
Includes

- HPDA-3 Speaker microphone
- Installation instructions

Options
- HPDA-1 Single channel version
  HPDA-2 Two channel version
- HPDA-3 Three channel version

Wiring Requirements

- Microphone: One stranded 22-gauge, 2-conductor shielded cable with drain wire. Max. cable length: 1000'
- Power: One stranded 18-gauge cable

HPDA-3 Specifications

- ETS SM1 series mics directly connect to the HPDA-3
- Independent 500mw Headphone amplifiers
- Volume controls for each channel
- 3.5mm stereo (wired mono) headphone jacks
- Audio output for DVR recordings
- DVR Playback audio input.
- Recorder switch. Selects live or playback sound source.
- Power: 12vdc@ 500ma
- Housed on a double gang stainless steel plate
- Power indicator
- Dimensions: L4.5" x W4.5" x H2"
- Weight .18lbs

Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning label in plain view is all that is required.

Warranty

1 year parts and labor.   *Made in U.S.A.*