




Electronic Technical Services Inc.
 211 Conchas SE
 Albuquerque, NM 87123
 PH 505-888-3923 FAX 505-888-3926
 Website: www.etsnm.com

Sound Surveillance™

STW3 Two-way Indoor Audio Surveillance Kit

Description

Single zone indoor 2 way audio surveillance system. Can be used independently for monitoring live audio or with audio recorders / DVRs for recording and playback. Both sides of conversations can be recorded.

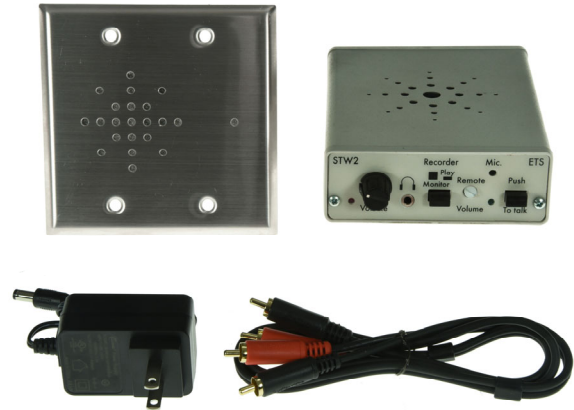

Kit Includes

- STW1-SEC Speaker/Microphone
- STW2 Base station
- 15vdc 800ma AC adapter
- 3' Dual RCA Patch cable
- Warning label

Options

- No call Switch: STW3-SE
- RM1, RM2, RM3 Rack mounts

Wiring Requirements

- 2 each, stranded 22-gauge, 2-conductor shielded cable. 500' max
- Call switch: 22-gauge, 2 conductor

Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning label in plain view is all that is required.

Warranty

1 year parts and labor.

Made in USA

STW1 Mic./speaker Specifications

- Omni-directional 25' pickup pattern.
- Low noise MOSFET pre-amplifier.
- 350Hz-12Khz Frequency response.
- Switch selectable hi-cut/low-cut filters limit frequency response to 700-7khz significantly reducing background noise.
- Adjustable gain
- 100 Ohm unbalanced output.
- Internal peak limiter circuit (.5 sec response)
- Lug-less terminal block makes cable termination fast and clean
- Power: 15 VDC @ 10mA
- 3" speaker, 70V line speaker input
- Flush mount, standard 2 gang stainless plate
- See STW1 data sheet for more information

STW2 Base station

- Built in talk-back microphone & pre-amp
- 70V Line speaker output
- Call switch input
- Remote speaker & microphone volume controls
- RCA jacks for DVR connections
- 2 Watt Power amplifier & 3" speaker
- Lug-less terminal block makes cable termination fast and clean
- Tape monitor switch
- 3.5mm Headphone jack
- Power: 15Vdc @ 500mA
- Dimensions W 4.1 x L 5.4 x H 1.5
- See STW2 data sheet for more information.