




Electronic Technical Services Inc.  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926  
Website: www.etsnm.com

# EDKS-x-1G-Vx-RM 2-8 channel 1G IP Camera or other Ethernet connected device Kill Switch

## Description

The EDKS-x is a device designed to interrupt power and streaming data from up to 8 IP cameras or other Ethernet connected devices. The EDKS-x is placed in-line with the end device's CAT6 Ethernet cable. 12-24vdc is applied or removed to enable or disable the cameras depending on which version EDKS-x is ordered. A switch or switches can be mounted on a wall of the room(s) along with an external power source to trigger the EDKS-x. Other equipment that outputs a 12-24vdc 500ma power source can also be used to trigger the EDKS-x.

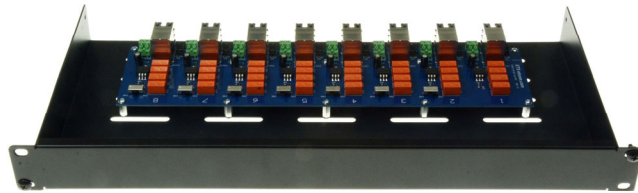

Specify EDKS-x where x = number of channels required.

## Includes:

- EDKS-x IP device kill switch.
- Rack mount screws
- Installation instructions.

## Options:

Board only (minus rack mount) version available. p/n: EDKS-x-1G-Vx

## Wiring requirements:

2 conductor 22 gauge for connecting 12Vdc trigger voltage

**Warranty**  
1 year parts and labor.

**Made in USA**

## EDKS-x Specifications

- Shielded CAT6 I/O Connectors
- Removeable terminal blocks for trigger Voltages
- Independent Trigger voltages or trigger channels 2-8 from channel 1. Each Channel Switch selectable.
- Trigger Voltage LED indicators
- IEEE802.af A and B mode compatible
- Supports 10/100M and 1G data rates
- Makes / breaks all 8 pins with relays.
- 100W PoE power switching rating
- Trigger Voltage Power: 12-24VDC @ 500mA.
- Reverse polarity protected
- 1U rack mounted, open frame.
- Dimensions: L 19 x W 8.5 x H 1.75
- Weight 1.8lb

## Two versions available:

EDKS-x-1G-VE-RM applying 12-24vdc enables camera

EDKS-x-1G-VD-RM applying 12-24vdc disables camera