




Sound Surveillance™

Electronic Technical Services Inc.  
211 Conchas SE  
Albuquerque, NM 87123  
PH 505-888-3923 FAX 505-888-3926  
Website: www.etsnm.com

# SMI16 16 Channel Interface Adapter

## Description

Powers up to 16 ETS SM1 series microphones and distributes their audio outputs to individual RCA (or optional 3.5mm) jacks. Designed for connecting SM1 series microphones to equipment with un-balanced, line level inputs. Ideal for use with DRVs, remote monitoring equipment and multiple CCTV monitors (with built in speakers).

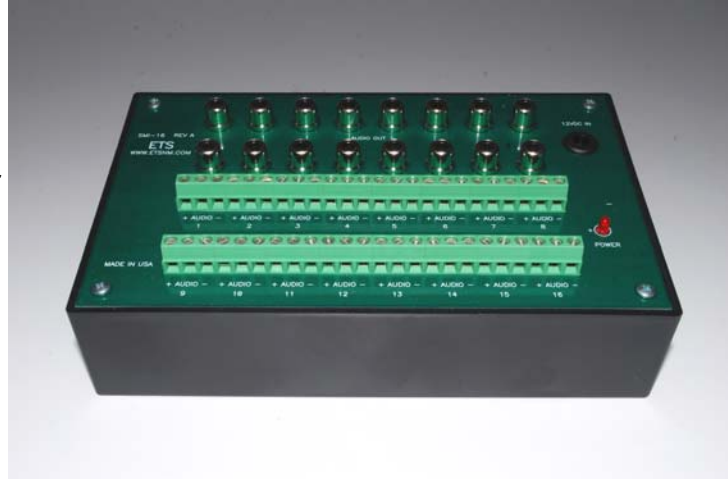

## Includes

- SMI16 Interface adapter.
- 12 VDC AC adapter.
- 16 each 3' RCA or 3.5mm patch cables.
- Installation instructions.

## Options

- SPECIFY: RCA OR 3.5mm output connectors.

## Wiring Requirements

- Microphone cable runs: Stranded 22-gauge, 2-conductor shielded cable. Distances up to 1500 feet each.

Warranty : 1 year parts and labor.

Made in USA

## SMI16 Interface Adapter Specifications

- Standard RCA or 3.5mm jacks for connection to DVRs etc.
- Line level (0db) output levels.
- Euro-style connectors makes cable terminations fast and clean.
- LED power indicator.
- Power:12 VDC @ 160mA
- Reverse polarity protected.
- All power circuitry and cable runs protected with auto-reset type fuse.
- Black plastic ABS housing.
- Dimensions: L 6.9 x W 4.3 x H 1.6

## Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning labels in plain view is all that is required.