

The WHSA-4 is an indoor/outdoor 4x4 horn speaker with a built in 10 Watt speaker power amplifier. It operates on 2 12v 12vdc @ 1A. The audio input is line level.

Mounting

Use the included mounting bracket and mount high enough where it's out of reach. The WHSA-4 can be adjusted to be very loud and can project sounds up to 100' away in moderately noisy environments.

Power

For best results, use only a REGULATED 12vdc 1A power supply for 30 Watt operation or 12-15v 1A for 10 Watt operation. Lower Voltages and current availability will cause distortion and Screeching and sputtering sounds.

Wiring


Use #18 2 conductor for the power input connection and keep cable length at 250' or below. Adequate power and cable type is essential for the speaker to perform well. For the audio connection, use RG174 coax or 22 gauge 2 conductor shielded cable. For the latter, Tie the red and black wires together to form the + connection and use the shield for ground. Keep the audio cable lengths at or below 500'

Note- The audio input is "line level" which can be identified as directly compatible with the camera if the data sheet for the camera has its audio output labeled as "audio out" or "line out". If you experience hum or other noise in the speaker and, try grounding the "-" connection of the 12VDC input to a known good earth or electrical ground.

Speaker Volume control

The WHSA-4 can be adjusted to be very loud and can project sounds up to 100' away in moderately noisy environments.

The volume control for the speaker is located on the PCB inside the speaker. You will need a small blade screwdriver to adjust it. It's set at the factory to mid position.

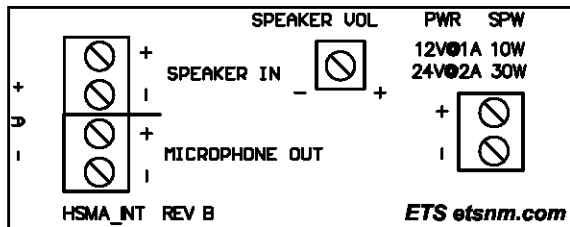

LAYOUT OF INTERFACE BOARD INSIDE THE BOX ON THE BACK OF THE HSA-11

Warranty

All ETS products carry a one year parts and labor warranty. This warranty does not cover damages as a result of misuse, improper handling of the unit or exposure to extreme temperatures or moisture. At its discretion, ETS reserves the right to repair or replace this unit under the conditions of the warranty. If you experience problems with your equipment call ETS at: 505-888-3923 to obtain a return authorization number. Equipment requiring repair beyond the warranty period or units that have been damaged or are not covered under the warranty can be repaired by ETS for a minimal cost under most conditions.

Made in USA