

ETS Inc. IWS-6X8 Illuminated Warning Sign Instructions


The IWS-6x8 is a low cost, high quality illuminated warning sign which operates from 12-24vdc. Custom lettering is available at no extra charge. Specify -R for red background and -G for green background colors. Custom colors and frame sizes are available on request. Custom lettering and fonts are available at no extra charge.

IWS-6X8 Placement

Place the IWS-6X8 on any wall at least 1' below the ceiling to allow for proper ventilation. The power wires for the sign are designed to go into the wall space directly behind the sign or into a remodel box cut into the wall.

Mounting

The IWS-6X8 is designed to hang on keyhole mounts cut into the back of the sign. The figure below shows the spacing and arrangement for the screws. Use the supplied #6 sheet metal screws and plastic anchors.

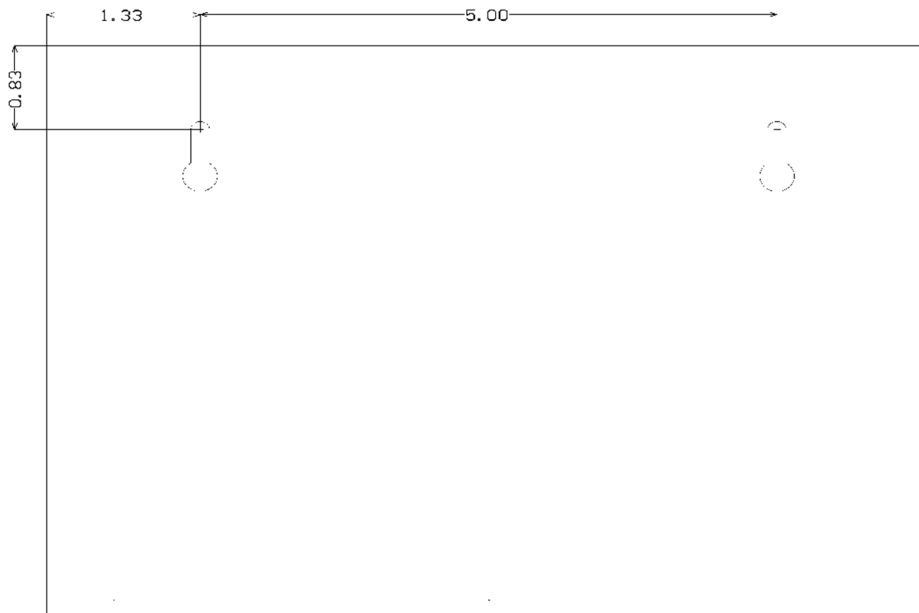

Cable Run

The IWS-6X8 operates optimally at 24vdc and consumes 250ma. The cable length or #18/2 wire using 24vdc is limited to 500' maximum. At 12vdc keep the cable run at 50' maximum. Power consumption at 12vdc is 500ma and if the cable run is longer than 50', the sign will become noticeably dimmer when lit due to the voltage drop loss across the wires.

Warranty

All ETS products carry a one year parts and labor warranty. This warranty does not cover damages as a result of misuse, improper handling of the unit or exposure to extreme temperatures or moisture. At its discretion, ETS reserves the right to repair or replace this unit under the conditions of the warranty. If you experience problems with your equipment call ETS at: 505-888-3923 to obtain a return authorization number. Equipment requiring repair beyond the warranty period or units that have been damaged or are not covered under the warranty can be repaired by ETS for a minimal cost under most conditions.

Made in the USA