



Electronic Technical Services Inc.
211 Conchas SE
Albuquerque, NM 87123
PH 505-888-3923 FAX 505-888-3926
Website: www.etsnm.com


Sound Surveillance™

SMA2-LPC5 2 Ch Speaker Driver Microphone Interface

Description

The SMA2-LPC5 is a 2 channel, line level input / output, 2.5 Watt, 70V speaker driver (power amplifier) and SM series microphone interface for use in 2 way audio surveillance systems. A single CAT5 cable connects the SMA2-LPC5 to any ETS speaker/microphone ordered with a C5 option. Connects to DVRs and remote monitoring equipment.

Use one of our Sound Surveillance Speaker / microphones (C5 option) with a built in 70V transformer & SM1 microphone for cable runs up to 1000 feet. OR use the MSI-BOC5 interface for separate speakers and microphones.

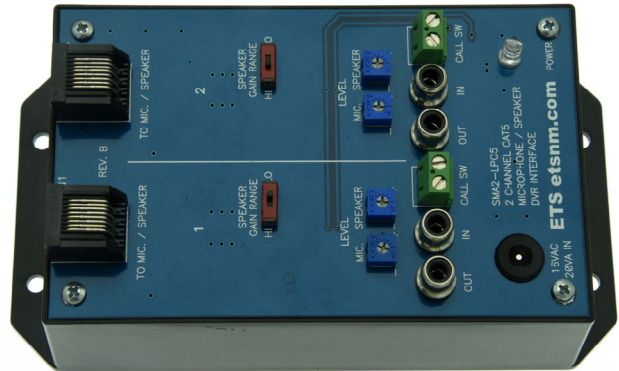

Includes

- SMA2-LPC5 Speaker driver / microphone interface.
- 12Vdc 800ma AC adapter.
- 4 each 6' RCA patch cords
- Installation instructions.

Options

- Add -3.5MM or -FL (Flying Leads) to P/N for alternate output cables.

Wiring Requirements

- 1 CAT5 8 conductor cable and 2 each RJ45 connectors. 1000' max.

Caution

It is the responsibility of the installation company and end user to comply with state and federal privacy laws regarding the use of audio surveillance equipment. If you are unfamiliar with these laws, consult a qualified attorney. In most cases, posting the provided warning labels in plain view is all that is required.

SMA2-LPC5 Speaker microphone interface

- Single CAT5 cable run up to 1000' between SMA2-LPC5 and speaker/microphone.
- Line level (0db) audio input and outputs.
- RCA input / output jacks for connection to DVRs etc.
- Adjustable independent volume controls for speaker and microphone.
- 2.5 Watts RMS power output per channel (70v balanced line).
- Terminals for connecting call switch or door lock relays.
- Short circuit protected.
- Built in 70V 2.5w audio power transformers.
- LED power indicator.
- Call sw: unreferenced, 2 free terminals.
- Power: 12Vdc @ 500mA
- PTTC fused.
- Black plastic ABS housing.
- Dimensions: L 5.3 x W 3.3 x H 1.6
- Weight .2kg

Warranty : 1 year parts and labor.

Made in USA